

FLUTE TWIST CEILING LIGHT

FLT TST

Mono IP20 CE

YYZ Flute range of architectural surface and pendant lights features premium aluminium housing that facilitates efficient performance. Provided with basic anti-glare shield in White/Black/Golden color. Deep anti-glare shield in Anodized black/Darklight/Champagne gold available on request. Reflector/Lens technology is employed according to the wattage requirement.

FEATURES

FINISH	BLACK, GREY, WHITE
WORKING VOLTAGE	220-240V 50/60Hz
RATED POWER	15W
RADIANCE ANGLE	NARROW, MEDIUM, WIDE, SUPER WIDE
LAMP LIFE	50,000 HRS
MOUNTING	SURFACE MOUNTED
CONNECTION	INDOOR RATED CONNECTIONS
DIMENSIONS	Ø72 x 229mm
OPERATION TEMP	-20° C - +50° C
CONTROL	ON/OFF, TRIAC



CITIZEN/LUMILEDS
LED Quality


240 VOLTS
Working Voltage

15 W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	15W
SUPPLY VOLTAGE	220-240VAC
COLORS	2700K, 3000K, 3500K, 4000K
CRI	90+
LUMEN	90lm/W

DIMENSIONS

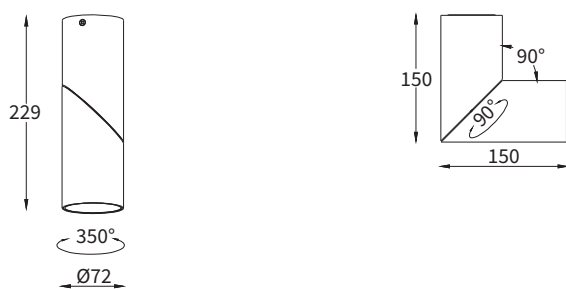

ORDERING LOGIC

PRODUCT	CONTROL	WATTAGE	COLOR TEMPERATURE	VOLTAGE	BEAM ANGLE	FINISH	ACCESSORIES	CUSTOM
FLT TST-15	ON/OFF TRIAC	15 - 15W	(CT27)	2700K	N - Narrow M - Medium W - Wide UW- Ultra wide	BL - Black	HCL - Honey Combo Louver	xx
			(CT30)	3000K		GR - Grey	LSL - Linear Spread Lens	
			(CT35)	3500K		WH - White	WWV - Wall Washer Visor	
			(CT40)	4000K			SP - Spread Lens	
							BD - Barn Doors	

Sample: FLT TST-15 - ON/OFF - 15 - CT27 - 240 - N - BL - HCL - XX

Honeycomb Linear spread lens Wall washer visor Spread lens Barn doors