## **LOCUS DOWN LIGHT**

# **LCS 75**



IP20



YYZ Locus series is a range of downlights designed for applications requiring accent and general lighting. It provides the perfect combination of efficiency, light comfort, and design, without compromising on lighting performance. It offers a wide choice of options for creating the desired ambience, no matter the application is.

#### **FEATURES**

MATERIAL Aluminum

FINISH White, Black

RATED POWER 7/10/15W

WORKING VOLTAGE 220-240V 50/60Hz

WORKING VOLIAGE 220 240 V 30/00112

RADIANCE ANGLE Narrow, Medium, Wide, Ultra wide

MOUNTING Ceiling recessed

CONNECTION Indoor rated connections

LAMP LIFE 50,000 Hrs

DIMENSION Ø75 x 85mm (Cutout Ø65mm)

OPERATIN TEMP -20° C - +50° C

CONTROL On/Off, Triac, 1-10V, Dali










#### **ELECTRICAL DATA**

POWER CONSUMPTION 7/10/15W SUPPLY VOLTAGE 220-240V AC

COLORS 2700K, 3000K, 3500K, 4000K

CRI 90+ LUMEN 90 lm/W

### **DIMENSIONS**

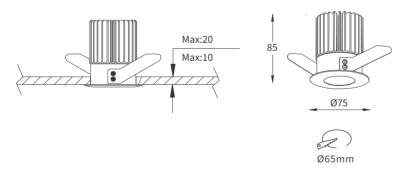





Linear Spread Lens

Spread Lens

### **ORDERING LOGIC**

PRODUCT	WATTAGE	COLOR TEMPERATURE		VOLTAGE	BEAM ANGLE	FINISH	ACCESSORIES		CUSTOM
LCS 75	7 - 7W	(CT27)	2700K	240VAC	N - Narrow	BL - Black	LSL -	Linear Spread Lens	XX
	10 - 10W	(CT30)	3000K		M - Medium	WH - White	SL -	Spread Lens	
	15 - 15W	(CT35)	3500K		W - Wide				
		(CT40)	4000K		U - Ultra Wide				

Sample: LCS 75 - 7 - CT27 - 240 - N - BL - LSL - XX