

LOCUS DOWN LIGHT

LCS 165

Mono IP20 CE

YYZ Locus series is a range of downlights designed for applications requiring accent and general lighting. It provides the perfect combination of efficiency, light comfort, and design, without compromising on lighting performance. It offers a wide choice of options for creating the desired ambience, no matter the application is.

FEATURES

MATERIAL	Aluminum
FINISH	White, Black
RATED POWER	32/42W
WORKING VOLTAGE	220-240V 50/60Hz
RADIANCE ANGLE	Narrow, Medium, Wide, Ultra wide
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	Ø165 x 170.5mm (Cutout Ø155mm)
OPERATING TEMP	-20° C - +50° C
CONTROL	On/Off, Triac, 1-10V, Dali




- 1 LED
LED Quality
- 240 VOLTS
Working Voltage
- 32/42W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	32/42W
SUPPLY VOLTAGE	220-240V AC
COLORS	2700K, 3000K, 3500K, 4000K
CRI	90+
LUMEN	90 lm/W

DIMENSIONS

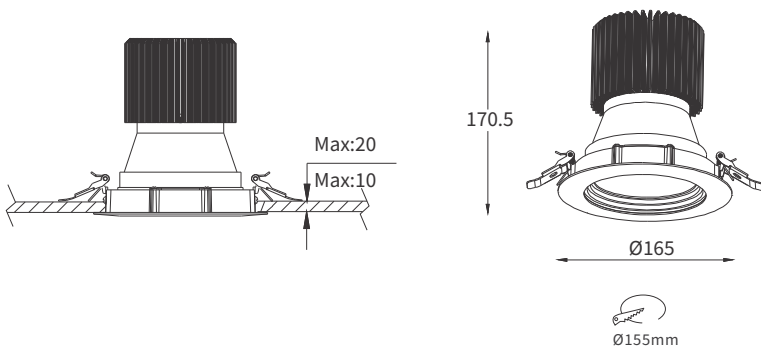

- Honey Combo Louver
- Linear Spread Lens
- Spread Lens

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	VOLTAGE	BEAM ANGLE	FINISH	ACCESSORIES	CUSTOM	
LCS 165	32 - 32W	(CT27)	240VAC	N - Narrow	BL - Black	HCL - Honey Combo Louver	xx	
	42 - 42W	(CT30)		3000K	M - Medium	WH - White		LSL - Linear Spread Lens
		(CT35)		3500K	W - Wide			SL - Spread Lens
		(CT40)		4000K	U - Ultra Wide			

Sample: LCS 165 - 32 - CT 27 - 240 - N - BL - HCL - XX