


OPERA ANTIGLARE ADJUSTABLE DOWN LIGHT

OPA AGA

Mono IP20 **CE**

YYZ Opera antiglare downlights features glare free UGR<12 with various beam angle which is suited for general lighting. The great variety of possible light sources, even the latest generation of LED, combined with the availability of a wide range of accessories, makes this family of products particularly suitable for any type of application, from commercial premises and offices to typical residential environments or highly professional facilities such as museum exhibitions.

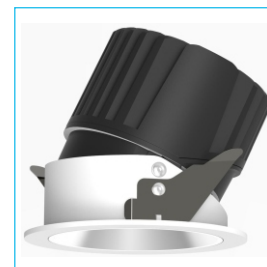

FEATURES


MATERIAL	Aluminum
FINISH	White, Black
RATED POWER	15W
WORKING VOLTAGE	220-240V 50/60Hz
RADIANCE ANGLE	18°, 25°, 38°
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	Ø85 x 74mm (Cutout Ø75mm)
OPERATING TEMP	-20° C - +50° C
CONTROL	On/Off, Triac, 1-10V, Dali
OPTIC	Optical PC Lens + Anti-glare reflector

- BRIDGELUX
LED Quality
- 240V AC
Working Voltage
- 15W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	15W
SUPPLY VOLTAGE	220-240V AC
COLORS	2700K, 3000K, 4000K
CRI	90
LUMEN	1229.11 lm

DIMENSIONS

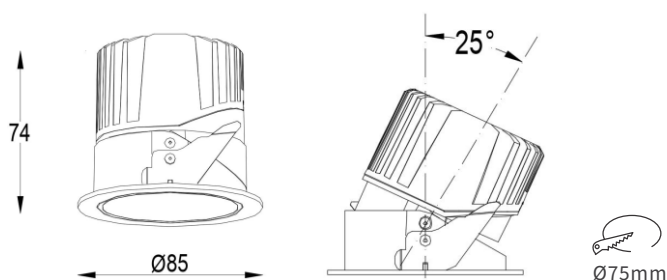

ORDERING LOGIC

PRODUCT	WATTAGE	BEAM ANGLE	COLOR TEMPERATURE	FINISH	ACCESSORIES	CUSTOM
OPA AGA	15 - 15W	18 - 18°	(CT27) 2700K	BK - Black	HCL - Honey Combo Louver	XX - Custom
		25 - 25°	(CT30) 3000K	WH - White	LSG - Linear Spread Glass	
		38 - 38°	(CT40) 4000K	XX - Custom	GG - Ground Glass	

Sample: OPA AGA - 15 - 18 - CT27 - BK - HCL - XX



Honeycomb louver Ground Glass Linear spread Glass