

EPSILON B SERIES

ESN-B

Mono IP20 CE

YYZ Epsilon series of downlights feature high powered COB led modules backed by excellent aluminum heatsink to deliver the best lumen performance. The black antiglare reflector with minimal ceiling aperture makes it the preferred choice for demanding architectural applications.

FEATURES

MATERIAL	Die-cast aluminum
FINISH	White, Black, Silver
RATED POWER	6/10/14/21/25/30W
WORKING CURRENT	150mA(6.0W), 250mA(10W), 350mA(14W) 550mA(21W), 700mA(25W), 800mA(30W)
RADIANCE ANGLE	15°/24°/36°/60°
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	Ø119 x 135mm (Cutout Ø110mm)
OPERATING TEMP	-20° C - +50° C
CONTROL	On/Off, 1-10V, Dali



CITIZEN
LED Quality


C 150/250/350/550/700/800mA
Working Current

W 6/10/14/21/25/30W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	6/10/14/21/25/30W
SUPPLY VOLTAGE	220-240VAC
COLORS	2700K, 3000K, 4000K, 5000K, 6500K
CRI	90
LUMEN	1584lm @ 30W 3000K
DRIVER	150mA(6.0W), 250mA(10W), 350mA(14W) 550mA(21W), 700mA(25W). 800mA(30W)

DIMENSIONS

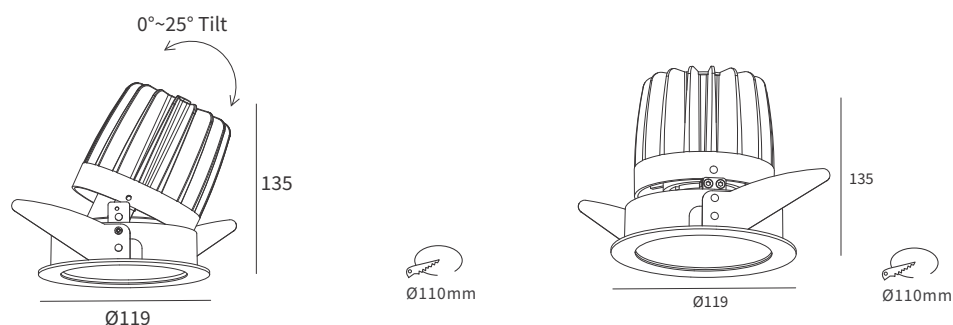

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	BEAM ANGLE	DRIVER	FINISH	TYPE
ESN-B	6 - 6W	(CT27)	2700K	15 - 15°	150 - 150mA(6W)	F - Fixed
	10 - 10W	(CT30)	3000K	24 - 24°	250 - 250mA(10W)	A - Adjustable
	14 - 14W	(CT40)	4000K	36 - 36°	350 - 350mA(14W)	
	21 - 21W	(CT50)	5000K	60 - 60°	550 - 550mA(21W)	
	25 - 25W	(CT65)	6500K		700 - 700mA(25W)	
	30 - 30W				800 - 800mA(30W)	

Sample: ESN-B - 6 - CT27 - 15 - 150 - WH - F