# **WET RATED LFX COB SERIES**













YYZ LFX COB IP54 series features excellent homogenous light, without visible light points. The COB strip is a high-density led lighting strip made by COB encapsulation, which can reduce the thermal resistance of the high-density strip circuit system, greatly improves the life of the LED, and the light flux density is high, the glare is small, and the light is uniform. These series is perfect for indirect lighting and hence used in offices, residential interiors, furniture, or places which require large luminous surface.



## **FEATURES**

LIGHT SOURCE COB

LED QUANTITY 300 Leds / mtr **FINISH** White PCB WORKING VOLTAGE 12 Volts RATED POWER 10W / mtr RADIANCE ANGLE 180° LAMP LIFE 50000 hrs

MOUNTING 3M Tape on the back CONNECTION Hardwired tails **CUTTING INCREMENTS** Every 10mm **DIMENSIONS** 5000 x 10mm MAX DAISY RUN 5 mtr















## **ELECTRICAL DATA**

POWER CONSUMPTION 10.0W SUPPLY VOLTAGE 12 Vdc SUPPLY CURRENT 240V ac

2700K, 3000K, 4000K, 5000K, 6000K **COLORS** 

CRI LUMEN 700-950lm

## **ORDERING LOGIC**


	WetRated 10							VOLTAGE	CIRCUIT	РСВ	CRI	NO OF LED ROWS	CONNECTION	
LFX W - WetRated (IP54)	(IP54)	10.00 - 10.0W	(CT30) (CT40) (CT50)	2700K 3000K 4000K 5000K	СОВ	Z3	300 - 300 LEDs/mtr	12-12V	CV-Constant voltage	10 - 10mm	H - HIGH (90)	1	HT - Hardwired OC - Outdoor Co	
			(C160)	6000K					MODEL	COLOR CONTROL	LIGHT EMITTING DIRECTION	LED POWER	PCB COLOR	LENGTH PER REEL
									R - Regular	M - Mono	T - Top	L - Low	W - White	L05 - 5mtr

Sample: LFX - W - 10.00 - CT 27 - COB - Z3 - 300 - 12 - CV - 10 - H -1 - HT - RMTLWL05






## **DIMENSIONS**

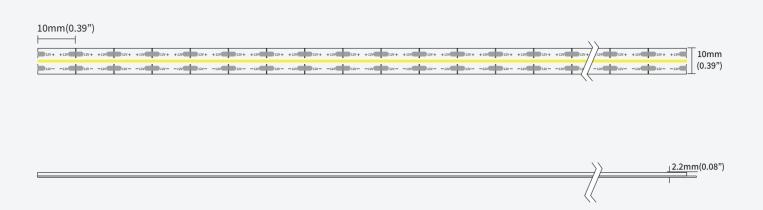

## **BINNING DIAGRAM**

## **BIN Details**



## **ACCESSORIES**

Surface mounted Hanging installation Corner installation Recessed installation installation

1013 1708 1715 2020 2020B 1616 1616B 2408 2415 2126