WET RATED LFX COB SERIES

LFX-W-10.00-CTXX-COB-Z3-600-24-CV-10-H-1-HT-RMTLWL05













YYZ LFX COB IP54 series features excellent homogenous light, without visible light points. The COB strip is a high-density led lighting strip made by COB encapsulation, which can reduce the thermal resistance of the high-density strip circuit system, greatly improves the life of the LED, and the light flux density is high, the glare is small, and the light is uniform. These series is perfect for indirect lighting and hence used in offices, residential interiors, furniture, or places which require large luminous surface.



FEATURES

LIGHT SOURCE COB

LED QUANTITY 600 Leds / mtr **FINISH** White PCB WORKING VOLTAGE 24 Volts RATED POWER 10W / mtr RADIANCE ANGLE 180° LAMP LIFE 50000 hrs

MOUNTING 3M Tape on the back CONNECTION Hardwired tails **CUTTING INCREMENTS** Every 10mm **DIMENSIONS** 5000 x 10mm MAX DAISY RUN 5 mtr













ELECTRICAL DATA

POWER CONSUMPTION 10.0W SUPPLY VOLTAGE 24 Vdc SUPPLY CURRENT 240V ac

2700K, 3000K, 4000K, 5000K, 6000K **COLORS**

CRI LUMEN 700-950lm

ORDERING LOGIC


PRODUCT SERIES	ТҮРЕ	POWER	COLOR TEMPER	ATURE	LED TYPE	BIN	NO. OF LED	VOLTAGE	CIRCUIT	РСВ	CRI	NO OF LED ROWS	CONNECTION	
	W - WetRated (IP54)	10.00 - 10.0W	(CT27) (CT30) (CT40) (CT50) (CT60)	4000K 5000K	СОВ	Z3	600 - 600 LEDs/mtr	24-24V	CV-Constant voltage	10 - 10mm	H - HIGH (90)	1	HT - Hardwire OC - Outdoor	
									MODEL	COLOR CONTROL	LIGHT EMITTING DIRECTION	LED POWER	PCB COLOR	LENGTH PER REEL
									R - Regular	M - Mono	T - Top	L - Low	W - White	L05 - 5mtr

Sample: LFX - W - 10.00 - CT 27 - COB - Z3 - 600 - 24 - CV - 10 - H -1 - HT - RMTLWL05






DIMENSIONS

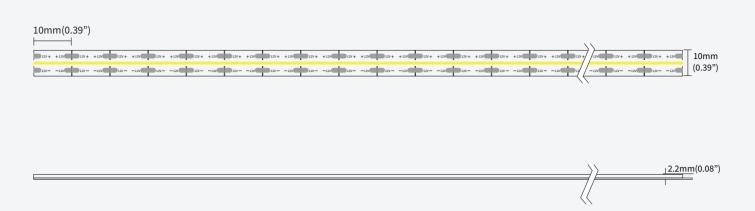

BINNING DIAGRAM

BIN Details



ACCESSORIES

Surface mounted









2020 202

Hanging installation

2020B

1616

Corner installation

1616B

Recessed installation



2415

Built-in installation

2126