OUTDOOR LFX COB SERIES

LFX-O-10.00-CTXX-COB-Z3-840-24-CV-10-H-1-HT-RMTLWL05







YYZ LFX COB IP65 series features excellent homogenous light, without visible light points. The COB strip is a high-density led lighting strip made by COB encapsulation, which can reduce the thermal resistance of the high-density strip circuit system, greatly improves the life of the LED, and the light flux density is high, the glare is small, and the light is uniform. These series is perfect for indirect lighting and hence used in offices, residential interiors, furniture, or places which require large luminous surface.

FEATURES

LIGHT SOURCE	CC
LED QUANTITY	84
FINISH	Wł
WORKING VOLTAGE	24
RATED POWER	10
RADIANCE ANGLE	18
LAMP LIFE	50
MOUNTING	3M
CONNECTION	На
CUTTING INCREMENTS	Ev
DIMENSIONS	50
MAX DAISY RUN	5 r

COB 840 Leds / mtr White PCB 24 Volts 10W / mtr 180° 50000 hrs 3M Tape on the back Hardwired tails Every 50mm 5000 x 10mm 5 mtr







ELECTRICAL DATA

POWER CONSUMPTION	10.0W
SUPPLY VOLTAGE	24 Vdc
SUPPLY CURRENT	240V ac
COLORS	2700+6500
CRI	>90
LUMEN	700-950lm

ORDERING LOGIC


PRODUCT SERIES	ТҮРЕ	POWER	COLOR TEMPERAT		LED TYPE	BIN	NO. OF LED	VOLTAGE	CIRCUIT	РСВ	CRI	NO OF LED ROWS	CONNECTION	
LFX	O - Outdoor (IP65)	10.00 - 10.0W		700K 500K	COB	Z3	840 - 840 LEDs/mtr	24-24V	CV-Constant voltage	10 - 10mm	H - HIGH (90)	1	HT - Hardwired OC - Outdoor C	
									MODEL	COLOR CONTROL	LIGHT EMITTING DIRECTION	LED POWER	PCB COLOR	LENGTH PER REEL
									R - Regular	M - Mono	Т - Тор	L - Low	W - White	L05 - 5mtr

OUTDOOR LFX COB SERIES

LFX-O-10.00-CTXX-COB-Z3-840-24-CV-10-H-1-HT-RMTLWL05




DIMENSIONS

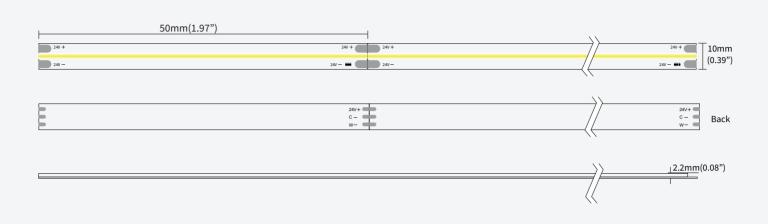

BINNING DIAGRAM

BIN Details





ACCESSORIES

Surface mounted

1715

Hanging installation









Corner installation



Recessed installation





Built-in installation

