# **OUTDOOR LFX COB SERIES**















YYZ LFX COB IP67 series features excellent homogenous light, without visible light points. The COB strip is a high-density led lighting strip made by COB encapsulation, which can reduce the thermal resistance of the high-density strip circuit system, greatly improves the life of the LED, and the light flux density is high, the glare is small, and the light is uniform. These series is perfect for indirect lighting and hence used in offices, residential interiors, furniture, or places which require large luminous surface.

# **FEATURES**

LIGHT SOURCE СОВ

LED QUANTITY 840 Leds / mtr **FINISH** White PCB WORKING VOLTAGE 24 Volts RATED POWER 10W / mtr 180° RADIANCE ANGLE LAMP LIFE 50000 hrs

MOUNTING 3M Tape on the back CONNECTION Hardwired tails **CUTTING INCREMENTS** Every 50mm **DIMENSIONS** 5000 x 10mm MAX DAISY RUN 5 mtr













## **ELECTRICAL DATA**

POWER CONSUMPTION 10.0W SUPPLY VOLTAGE 24 Vdc **SUPPLY CURRENT** 240V ac **COLORS** 2700+6500 CRI >90 LUMEN 700-950lm

#### **ORDERING LOGIC**


PRODUCT SERIES	ТҮРЕ	POWER	COLOR TEMPE	RATURE	LED TYPE	BIN	NO. OF LED	VOLTAGE	CIRCUIT	РСВ	CRI	NO OF LED ROWS	CONNECTION	
LFX	O - Outdoor (IP67)	10.00 - 10.0W	(CT27) (CT65)	2700K 6500K	СОВ	Z3	840 - 840 LEDs/mtr	24-24V	CV-Constant voltage	10 - 10mm	H - HIGH (90)	1	HT - Hardwired Tail OC - Outdoor Connector	
									MODEL	COLOR CONTROL	LIGHT EMITTING DIRECTION	LED POWER	PCB COLOR	LENGTH PER REEL
									R - Regular	M - Mono	T - Top	L - Low	W - White	L05 - 5mtr

Sample: LFX - O - 10.00 - CT 27 - COB - Z3 - 840 - 24 - CV - 10 - H -1 - HT - RMTLWL05






### **DIMENSIONS**

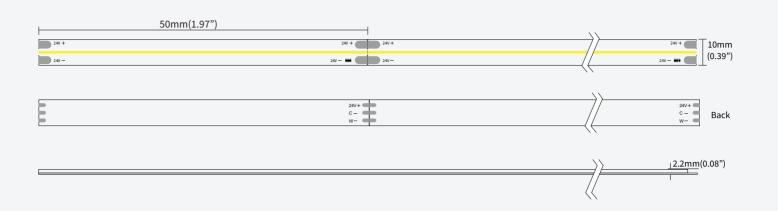

#### **BINNING DIAGRAM**

#### **BIN Details**



# **ACCESSORIES**

Surface mounted











Hanging installation







Corner installation

Recessed installation





Built-in installation