

POLO

POL 50

Mono, RGB & RGBW IP66 CE

YYZ Polo is a high brightness luminaire in power LED version providing precision optical systems which gives very low glare rating, while reducing light pollution and specially designed for landscapes and in unique structural design shape. These luminaires are designed to offer functional, a wide range of lighting solutions and dramatic highlighting of the architectural facades, landscapes, trees through the superior finishing as well highest efficiency with a long service life. This exterior ground spike luminaires are made in aluminum body and can achieve the desired effect in a wide range of applications with high quality optical systems and for direct lighting.



FEATURES

MATERIAL	Aluminum
FINISH	Black
RATED POWER	36, 48, 50 W
WORKING VOLTAGE	240V ac, 24V dc
BEAM ANGLE	6°, 12°, 15°, 18°, 24°, 25°, 30°, 38°, 40°, 45°, 60°
MOUNTING	Spike, Pole, Tree mounted
CONNECTION	Outdoor rated connections
LAMP LIFE	50,000 hrs
DIMENSIONS	Ø150 x 303mm
OPERATION TEMP	-20° C - +50° C
CONTROL	On/Off, Dali, Triac, 1-10V, Dmx512

CITIZEN, EPISTAR
LED Quality


240V AC/24V DC
Working Voltage

36W, 48W, 50W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	36, 48, 50 W
SUPPLY VOLTAGE	240V ac, 24V dc
COLORS	2700K, 3000K, 4000K, 5000K, 6000K, RGB, RGBW
CRI	80, 90

DIMENSIONS

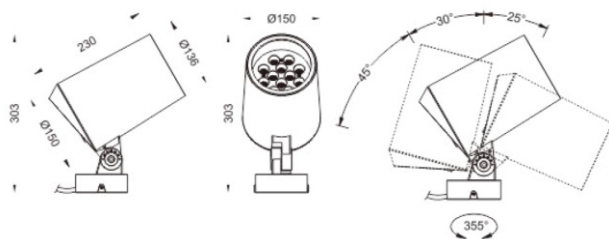

Optional



ORDERING LOGIC

PRODUCT	WATTAGE	BEAM ANGLE	COLOR TEMPERATURE	VOLTAGE	FINISH	CUSTOM
POL 50	36 - 36W	6 - 6°	(CT27) 2700K	24 - 24V DC	BK - Black	XX - XX
	48 - 48W	12 - 12°	(CT30) 3000K	240 - 240V AC	XX - Custom	
	50 - 50W	15 - 15°	(CT40) 4000K			
		18 - 18°	(CT50) 5000K			
		24 - 24°	(CT60) 6000K			
		25 - 25°	(RGB) RGB			
		30 - 30°	(RGBW) RGBW			
		38 - 38°				
		40 - 40°				
		45 - 45°				
	60 - 60°					

Sample: POL 50 - 36 - 6 - CT 27 - 24 - BK - XX