

# GRILLE SERIES

## GLE-1

Mono IP54 CE

YYZ Grille downlights in square profile with choice of 1, 2 or 3 lamps. These recessed downlights are designed for applications requiring Accent, General Lighting, range of choices of beam angles.



### FEATURES


FINISH	WHITE, BLACK
WORKING VOLTAGE	24V DC
RATED POWER	40W, 50W, 60W
BEAM ANGLE	15°, 24°, 38°, 45°, 60°
LAMP LIFE	50,000 HRS
MOUNTING	CEILING RECESSED
CONNECTION	INDOOR RATED CONNECTIONS
DIMENSIONS	160x160x190mm(Cutout 140x140mm)
OPERATION TEMP	-20° C - +50° C
CONTROL	ON/OFF

- CREE LED Quality
- 24V DC Working Voltage
- 40W, 50W, 60W Rated power

### ELECTRICAL DATA

POWER CONSUMPTION	40W, 50W, 60W
SUPPLY VOLTAGE	24V DC
COLORS	2700K, 3000K, 4000K, 6000K
CRI	90
LUMEN	80lm/W@2700k, 85lm/W @ 3000K, 90lm/W @ 4000K and 100lm/W @ 6000k

### DIMENSIONS

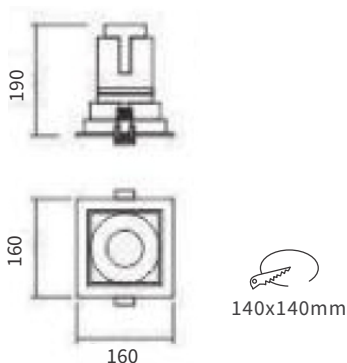

### ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	VOLTAGE	BEAM ANGLE	FINISH	CUSTOM	
GLE-1	40 - 40W	(CT27)	2700K	DC - 24V DC	15 - 15°	WH - White	xx
	50 - 50W	(CT30)	3000K		24 - 24°	BK - Black	
	60 - 60W	(CT40)	4000K		38 - 38°		
		(CT60)	6000K		45 - 45°		
					60 - 60°		

Sample: GLE-1 - 40 - CT27 - DC - 15 - WH - XX