

GRILLE SERIES

GLE-2

Mono IP54 CE

YYZ Grille downlights in square profile with choice of 1, 2 or 3 lamps. These recessed downlights are designed for applications requiring Accent, General Lighting, range of choices of beam angles.



FEATURES


FINISH	WHITE, BLACK
WORKING VOLTAGE	24V DC
RATED POWER	2x40W, 2x50W, 2x60W
BEAM ANGLE	15°, 24°, 38°, 45°, 60°
LAMP LIFE	50,000 HRS
MOUNTING	CEILING RECESSED
CONNECTION	INDOOR RATED CONNECTIONS
DIMENSIONS	L315xW165xH190mm(Cutout 295x145mm)
OPERATION TEMP	-20° C - +50° C
CONTROL	ON/OFF

- CREE LED Quality
- 24V DC Working Voltage
- 2x40W, 2x50W, 2x60W Rated power

ELECTRICAL DATA

POWER CONSUMPTION	2x40W, 2x50W, 2x60W
SUPPLY VOLTAGE	24V DC
COLORS	2700K, 3000K, 4000K, 6000K
CRI	90
LUMEN	80lm/W@2700k, 85lm/W @ 3000K, 90lm/W @ 4000K and 100lm/W @ 6000k

DIMENSIONS

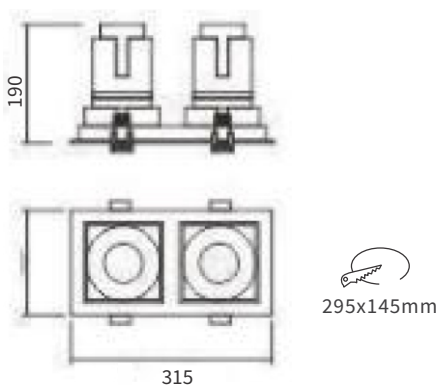

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	VOLTAGE	BEAM ANGLE	FINISH	CUSTOM	
GLE-2	80 - 2x40W	(CT27)	2700K	DC - 24V DC	15 - 15°	WH - White	xx
	100 - 2x50W	(CT30)	3000K		24 - 24°	BK - Black	
	120 - 2x60W	(CT40)	4000K		38 - 38°		
		(CT60)	6000K		45 - 45°		
					60 - 60°		

Sample: GLE-2 - 80 - CT27 - DC - 15 - WH - XX