IRIS PENDANT LINEAR



IRS-PL



IP20 (E

YYZ Iris is a direct LED luminaire with wide range of modular optic within a single fixture that can be combined to produce different light distribution to appeal diverse architectural illumination requirements. It is with artistic design, wide beam UGR<19 and is applicable in areas like buildings, office, shopping mall and educational lighting.

FEATURES

FINISH BLACK, WHITE, GREY WORKING VOLTAGE 220-240V 50/60Hz

RATED POWER

DISTRIBUTION

LAMP LIFE

MOUNTING

DIMENSIONS

OPERATING TEMP

CONTROL

64/72W

WIDE

50,000 HRS

HANGING

1205x44x64mm

-20° C - +50° C

ON/OFF, 1-10V, DALI




ELECTRICAL DATA

POWER CONSUMPTION 64/72W SUPPLY VOLTAGE 220-240VAC

COLORS 3000K, 4000K, 5000K

CRI 80+ LUMEN 80lm/W

DIMENSIONS

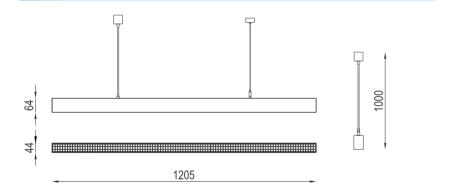

ORDERING LOGIC

| PRODUCT | WATTAGE | COLOR [*] | ΓΕΜΡΕRATURE | CONTROL | VOLTAGE | | OPTIC | | FII | NISH | CUSTOM |
|---------|---------|--------------------|-------------|---------|---------|---|-------|------|------|-------|--------|
| IRS-PL | 64 -64W | (CT30) | 3000K | ON/OFF | 240VAC | W | - | Wide | BK - | Black | XX |
| | 72 -72W | (CT40) | 4000K | 1-10V | | | | | WH - | White | |
| | | (CT50) | 5000K | DALI | | | | | GR - | Grey | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |

Sample: IRS-PL - 64 - CT30 - ON/OFF - 240 - W - BK - XX