LINEAR FLEX WASHER - LFW SERIES



LFW Mono IP67 CE

YYZ LFW wall washer performs to give the ideal solution in achieving a flawless wall washing effect. Streamlined design with highly focussed and direction beam from a PMMA lens with silicone encapsulation. Backed with high quality aluminium profile for thermal management and adjustable brackets for effective installation.

Modular system available in standard lengths and can be customized as per project requirements. IP67 structural waterproof making it desirable for a wide range of applications like wall grazing, linear and indirect illumination for exterior architectural, retail and hospitality applications.

FEATURES

LED TYPE LED QUANTITY BEAM ANGLE AVAILABLE LENGTH MOUNTING OPERATION TEMP LAMP LIFE CUTTING INCREMENTS


2835 48 LEDs/m 30°, 45°, 60°, 20°x45° 5000mm Surface mounted -25° C - +60° C 50000 hrs 125mm

LUMILEDS LED Quality 24 V DC Working Voltage 18 W / m Rated power

ELECTRICAL DATA

POWER CONSUMPTION	18W/m,
LED VOLTAGE	24V DC
COLORS	2700K, 3000K, 3500K, 4000K
CRI	90+
LUMEN	103 lm/W

DIMENSION

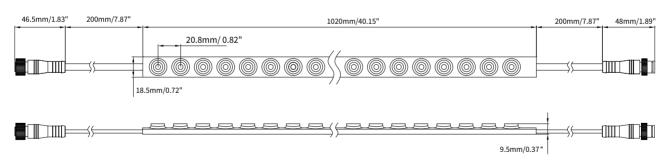

ORDERING LOGIC

PRODUCT	OPTIC			COLOR TE	MPERATURE	VOLTAGE	CUSTOM
LINEAR FLEX WASHER - (LFW)	30	-	30°	(CT27)	2700K	24 - 24VDC	XX
	45	-	45°	(CT30)	3000K		
	60	-	60°	(CT35)	3500K		
	20x45	5 - 2	0°x45°	(CT40)	4000K		
				(CTXX)	CUSTOM		

Sample: LFW - 30 - CT 27 - 24 - XX





LFW

ACCESSORIES



DIAGRAM

