

LINEAR INGROUND OUTDOOR

LRO-18

Mono & RGB IP67 CE

YYZ LRO series is the linear inground light. RGB or RGBW, 2700-5700K available, double waterproof design and matching degassing valve with IP67-rated. Carefully designed embedded parts – Easy to install with no gaps. Widely used in public square, park, stage, garden etc.



FEATURES

FINISH	ALUMINIUM
WORKING VOLTAGE	24 V DC
RATED POWER	18W/24W/36W per meter
BEAM ANGLE	15°, 30°, 45°, 60°, 15°x60°, 20°x40°
MOUNTING	INGROUND
OPTIC	CLEAR TEMPERED GLASS
DIMENSIONS	1000(L) x 98(W) x 80mm(H)
OPERATION TEMP	-25° C - +50° C
LAMP LIFE	50000 HRS
BODY COLOR	RAL6063
CONTROL	ON/OFF, DMX512

OSRAM/BRIGHTEX
LED Quality


24 VOLTS
Working Voltage

18W / 24W / 36W/mtr
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	18W/24W/36W per meter
SUPPLY VOLTAGE	24 V DC
COLORS	2700K, 3000K, 4000K, 5700K, RGB, RGBW
CRI	80+
LUMEN	72-75lm/W at 3000K, 25-30 lm/W at RGB, 20-25lm/W at RGBW

DIMENSION

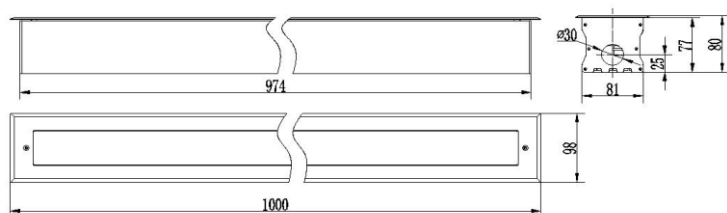

ORDERING LOGIC

PRODUCT	WATTAGE	OPTIC	COLOR TEMPARTURE	VOLTAGE	BODY COLOR	ACCESSORY	CUSTOM
LRO-18	18 - 18W	15 - 15°	(CT27) 2700K	24 - 24VDC	AL - RAL6063	HCL - Honey comb louver	XX
	24 - 24W	30 - 30°	(CT30) 3000K				
	36 - 36W	45 - 45°	(CT40) 4000K				
		60 - 60°	(CT57) 5700K				
		15x60 - 15°x60°	(RGB) RGB				
		20x40 - 20°x40°	(RGBW) RGBW				

Sample: LRO-18 - 18 - 15 - CT 27 - 24 - AL - HCL - XX