

LINEAR WALLWASHER

LRW38-Mono



YYZ LRW is wall washer series linear light of new solution for large scale with high brightness architectural illumination. Its streamline design and aluminum profile along with adjustable brackets make it an elegant solution for wall washing and grazing applications. This IP66 rated modular system is available in 300mm, 500mm, or 1000mm lengths and can be customized as per project situations. Its integrated design of heat dissipating structure and degassing valve make it suitable for exterior architectural, retail and hospitality applications.



FEATURES



FINISH	6063 Aluminum
WORKING VOLTAGE	24V dc
RATED POWER	24, 36, 48W/mtr
BEAM ANGLE	7°, 15°, 30°, 45°, 60°, 15°x60°, 20°x40°
MOUNTING	Surface mounting
OPTIC	PC
DIMENSIONS	1000(L) x 38(W) x 57.2(H)mm
OPERATION TEMP	-25° C - +50° C
STORAGE TEMP	-40° C - +80° C
WEIGHT	1.5kg
LAMP LIFE	50000 hrs
BODY COLOR	Black, Grey, White, Green
CONTROL	Dmx512, On/Off



ELECTRICAL DATA

SUPPLY VOLTAGE	24V dc
COLORS	2700K, 3000K, 4000K, 5000K, 6000K
LUMEN	92-109lm/W @ 24W, 110.2-112.4lm/W @ 36W, 66.5-87lm/W @ 48W

DIMENSION

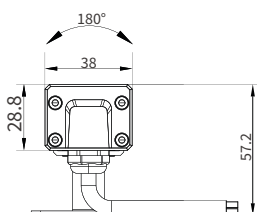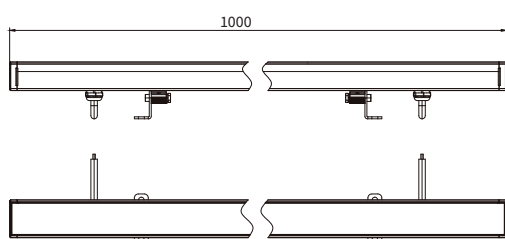

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	VOLTAGE	BEAM ANGLE	BODY COLOR	ACCESSORIES	CUSTOM	
LRW38	24	(CT27)	DC - 24VDC	7	BK	LL - Longitudinal Louvers LB - Light Baffle SB - Semicircle Bull's-eye	XX - XXX	
	-	(CT30)		7°	-			Black
	36	(CT40)		15	GR			Grey
	-	(CT50)		15°	WH			White
	48	(CT60)		30	GN			Green
	-	(CT60)		45				
				60				
				15x60	15°x60°			
				20x40	20°x40°			

Sample: LRW38 - 24 - CT27 - DC - 7 - BK - LL - XX