

HERMETIC DECO 1

HMT-D1

Mono IP20

YYZ Hermetic is a tough and corrosion resistant surface mounted luminaire suitable for application areas of high humid and dusty atmospheres. HMT-D is made of aluminum housing and a thick injection moulded polycarbonate cover. Wide beam optic and high efficiency makes it the best choice for use in garages, factories etc.



FEATURES

MATERIAL	Aluminum
FINISH	White
RATED POWER	10W, 18W, 22W, 29W, 35W, 55W
WORKING VOLTAGE	200-240V AC
RADIANCE ANGLE	120°
MOUNTING	Surface mounted
CONNECTION	Outdoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	600, 1200, 1500, 1800(L) x 55 (W) x 59(H)mm
OPERATING TEMP	-25° C - +50° C
CONTROL	On/Off, 1-10V, Dali, Motion sensor

CITIZEN/NICHIA/SAMSUNG/LUMILEDS
LED Quality


220-240VAC
Working Voltage

10W/18W/22W/29W/35W/55W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	10W, 18W, 22W, 29W, 35W, 55W
SUPPLY VOLTAGE	200-240V AC
COLORS	4000K, 6500K
CRI	80, 90
LUMEN	120-130 lm/W

DIMENSION

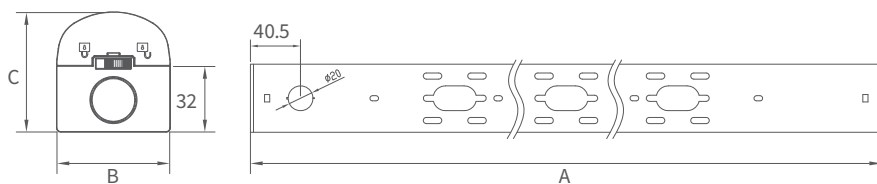

A	B	C
600	55	59
1200	55	59
1500	55	59
1800	55	59

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	DRIVER	CUSTOM
HMT-D1	10 - 10W(600mm)	(CT40) 4000K	ND - Non-Dimmable	XX - XXX
	18 - 18W(1200mm)	(CT65) 6500K	AN - 1-10V	
	22 - 22W(1500mm)		DA - Dali	
	29 - 29W(1500mm)		MS - Motion Sensor	
	35 - 35W(1200, 1500, 1800mm)			
	55 - 55W(1500mm, 1800mm)			

Sample: HMT-D1 - 10 - CT40 - ND - XX