

# HERMETIC 6

## HMT 6

**Mono** IP66 IK08

YYZ Hermetic is a tough and corrosion resistant surface/suspension mounted weatherproof luminaire suitable for high humidity areas. It is made of polycarbonate moulded base and a thickened polycarbonate (PC) is used for injecting the cover, which make sure that the lamp structure is more strong and stable. It provides better wide-beam light distribution and highly efficient hence used in garages and factories.



### FEATURES

MATERIAL	Polycarbonate
FINISH	Grey
RATED POWER	15W, 30W, 36W, 45W, 60W, 70W
WORKING VOLTAGE	220-240V AC
RADIANCE ANGLE	120°
MOUNTING	Surface mounted
CONNECTION	Outdoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	665, 1275, 1575(L) x 84, 134 (W) x 90(H)mm
OPERATING TEMP	-25° C - +50° C
CONTROL	On/Off

**SAMSUNG/LUMILED**  
LED Quality


**220-240VAC**  
Working Voltage

**15W/30W/36W/45W/60W/70W**  
Rated power

### ELECTRICAL DATA

POWER CONSUMPTION	15W, 30W, 36W, 45W, 60W, 70W
SUPPLY VOLTAGE	220-240V AC
COLORS	3000K, 4000K, 6500K
CRI	80
LUMEN	1950 lm @15W, 3900 lm @30W, 4680 lm @36W, 5850 lm @45W, 7800 lm @60W, 9100 lm @70W,

### DIMENSION

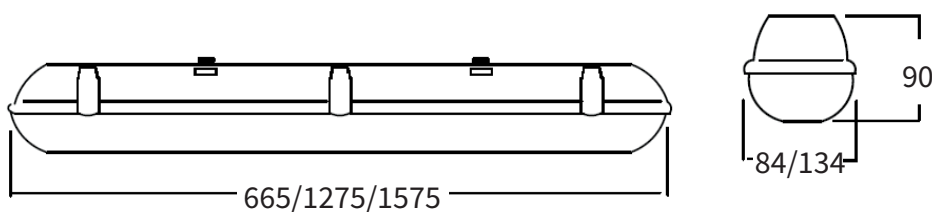

### ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	FIXTURE SIZE -L x W x H	ACCESSORIES
HMT 6	15 - 15W	(CT30) 3000K	15W - 665 x 84 x 90mm	SP - Suspension Kit
	30 - 30W	(CT40) 4000K	30W - 665 x 134 x 90mm	EM - Emergency Kit
	36 - 36W	(CT65) 6500K	36W - 1275 x 84 x 90mm	MS - Motion Sensor
	45 - 45W		45W, 60W - 1275 x 134 x 90mm	SS - Stainless Steel; Clip
	60 - 60W			
	70 - 70W			

Sample: HMT 6 - 15 - CT30 - 15W - SP