


# APERTURE-44 ECO ANTIGLARE

## APR44 ECO AG

**Mono** IP20 CE

YYZ Aperture 44 ECO is a suspension ceiling mounted luminaire with extruded aluminium housing, with PMMA diffuser as optic. Ideal for varied commercial spaces, particularly for office lighting applications.

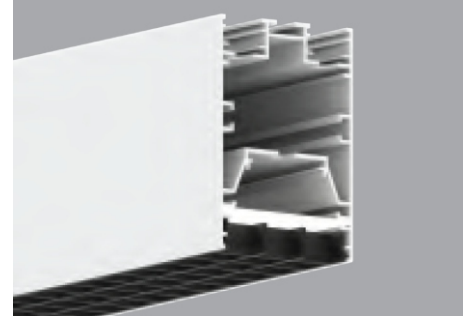

### FEATURES

HOUSING	Extruded aluminium
FINISH	White, Grey, Black
BEAM ANGLE	120°
MOUNTING	Pendant mounting
OPTIC	PMMA Milky, PMMA Black
DIMENSIONS	240x44x64mm
OPERATION TEMP	-20° C - +50° C
LAMP LIFE	50,000 hrs
CONTROL	On/Off, Dali, 1-10V
LUMEN	70lm/W

CREE/SAMSUNG  
LED Quality


220-240V AC  
Working Voltage

30W/960mm  
Rated power

### ELECTRICAL DATA

RATED POWER	30W/960mm
COLORS	3000K, 4000K, 5000K
CRI	90

### DIMENSION

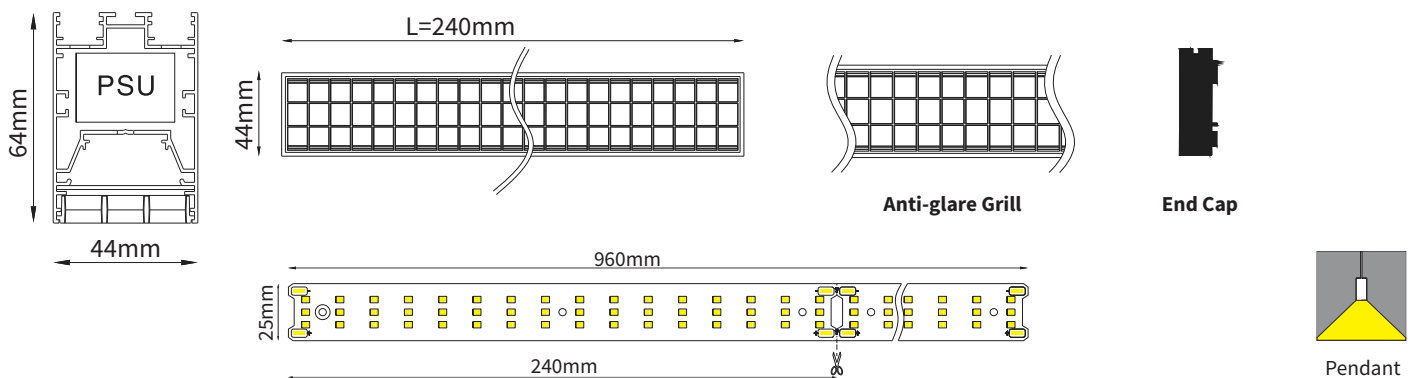

### ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	DRIVER	FINISH
APR44 ECO AG	30 - 30W/960mm	(CT30)	3000K SW - ON-OFF	WH - White
		(CT40)	4000K AN - 0-10V	BK - Black
		(CT50)	5000K DA - DALI	GR - Grey

Sample: APR44 ECO AG - 30 - CT27 - SW - WH