

ZOOM TRACK 1 LIGHT

ZT 1

Mono IP42 CE

YYZ Zoom track offers a complete range for the perfect lighting which exhibits sensitive and high precise spotlight system for sophisticated lighting scenarios. It enables sharp object focusing through adjustable lens. Adjustable distance between the two convex lenses to achieve various size of light spot. Drawing up/down the middle ring to attain different sharpness of the light spot dead line.



FEATURES

FINISH	Black
WORKING VOLTAGE	200-240V AC
RATED POWER	10W, 15W, 20W, 32W
RADIANCE ANGLE	25°-36°, 54°
MOUNTING	Surface, Recessed, Track, Magnetic track mounted
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 hrs
DIMENSIONS	Ø88x273mm
OPERATION TEMP	-20° C - +50° C
CONTROL	Triac, 0-10V, Dali

CITIZEN/BRIDGELUX
LED Quality


200-240V AC
Working Voltage

10W/15W/20W/32W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	10W, 15W, 20W, 32W
SUPPLY VOLTAGE	220-240V AC
COLORS	2700K, 3000K, 3500K, 4000K, 5000K, 6000K, Tunable (2700-5700K)
CRI	80, 90, 96
LUMEN	900 ~ 1100lm @ CRI 80, 800 ~ 1000lm @ CRI 90, 600 ~ 700lm @ CRI 96

DIMENSIONS

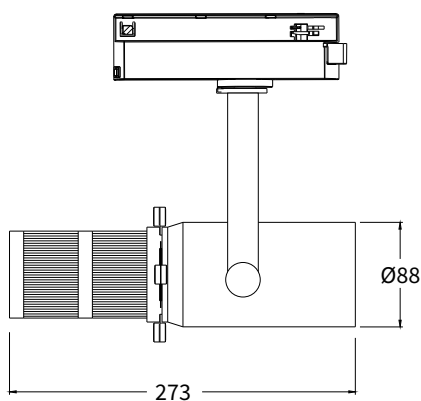

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	VOLTAGE	BEAM ANGLE	FINISH	CRI
ZT 1	10 - 10W	(CT27) 2700K	AC - 200-240VAC	25 - 25°-36°	BK - Black	80 - 80
	15 - 15W	(CT30) 3000K		54 - 54°		90 - 90
	20 - 20W	(CT35) 3500K				96 - 96
	32 - 32W	(CT40) 4000K				
		(CT50) 5000K				
		(CT60) 6000K				
		(TW) Tunable (2700-5700k)				

Sample: ZT 1 - 10 - CT27 - AC - 25 - BK - 90