ZEBRA POLE LIGHT ZRA-PL 2





IP66 IK08 €

The Zebra Pole Light combines a lighting pole/column and arm into a single rectangular section. This design allows for the placement of two light points at different directions and heights on the same pole. The product is ideal for illuminating streets, avenues, residential areas, and pedestrian zones. It is available in Type 2, Type 3, and Type 4 light distribution classifications for roadways. The poles are offered in heights ranging from 3.5m to 8m. Both the pole section and the arm section are made of extruded 6063 T5 aluminum with a low copper content, measuring 200mm wide and 150mm thick. The pole features a weather-sealed door opening of 400mm x 100mm for installing an MCB/Fuse cutout (to be supplied by others). The outreach length of the arm can be customized within structural limits. The pole's base plate dimensions are 400mm x 400mm x 15mm thick and come complete with four M24 x 500mm long LAnchor Bolts, along with two nuts and two washers per anchor bolt.

FEATURES

HOUSING Heavy duty die-cast aluminum

WORKING VOLTAGE 220-240V AC MOUNTING Pole luminaire

OPTIC Type 2, Type 3, Type 4 light distribution available

DIMENSIONS Arm length 1000x200x150mm, Pole Height 3500 to 8000mm

OPERATION TEMP -30° C - +50° C

BODY COLOR Dark grey, Black, White

LAMP LIFE 50,000 hrs
CONTROL On/Off








ELECTRICAL DATA

RATED POWER 30W, 40W, 60W, 80W, 00W COLORS 3000K, 4000K, 6000K

CRI 85+

LUMEN OUTPUT 30W-3500lm, 40W-4500lm, 60W-6500lm, 80W-9000lm, 100W-11300lm

DIMENSION

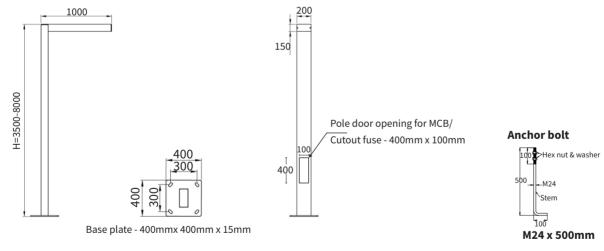

ORDERING LOGIC

PRODUCT		WAT	ΓAGE	COLOR TEMPERATURE	OPTIC	VOLTAGE	CONTROL	POLE HEIGHT	FINISH
ZRA-PL2	30	-	30W	(CT30) 3000F	T2 - Type 2 Distribution	AC - 220-240V AC	ND - Non Dimmable	35 - 3500mm	DG - Dark Grey
	40	-	40W	(CT40) 4000H	T3 - Type 3 Distribution			40 - 4000mm	BK - Black
	60	-	60W	(CT60) 6000H	T4 - Type 4 Distribution			60 - 6000mm	WH - White
	80	-	80W					70 - 7000mm	
	100) -	100W					80 - 8000mm	

Sample: ZRA-PL2 - 30 - CT30 - T2 - AC - ND - 35 - DG