

LINEAR FIXTURE TRACK - PENDANT SPEC SHEET



LFT60-C



The LFT60-C Series is a collection of pendant lighting fixtures designed to enhance the ambiance. With its wide range of track mounting options, the LFT60-C is compatible with recessed, surface and suspended pendant mounting. The series is equipped with dimming and standard color temperature of 3000K. The LFT60-C1 has a rated power of 10 Watts with three beam angles options, suitable for a different environment.




LFT60-C1

SPECIFICATIONS

OPERATING VOLTAGE	120 VAC
RATED POWER	10W
CONTROL	0/1-10 V Dimmable
FLUX	557 lm
CRI	>90
BODY FINISH	Black, White
BAFFLE FINISH	Black, White, Copper
MOUNTING	Track mounted
PROJECTION	20°, 25°, 36°

- V** 120 VAC
Operating Voltage
- W** 10W
Rated Power

DIMENSIONS

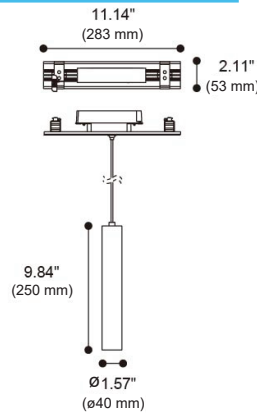

ORDERING CODE


SERIES	TYPE	POWER	VOLTAGE	CRI	COLOR TEMPERATURE	PROJECTION	TRACK MOUNTING	BODY FINISH	BAFFLE FINISH
LFT60	C1-Pendant 1	10W - 10 WATTS	AC - 120VAC	90 - CRI90	CT30 - 3000K CTXX - CUSTOM	20D - 20 Degrees 25D - 25 Degrees 36D - 36 Degrees	RM - Recessed Mount SM - Surface Mount PM - Pendant Mount	BK - Black WH - White	BK - Black WH - White CO - Copper

Sample: LFT 60-C1 - 10W- AC - 90 - CT30 - 20D - SM - BK - CO - ACHO-13


ACCESSORIES

ACHO-13 - Honeycomb Louver


PHOTOMETRIC DATA



BEAM ANGLE: 20°
MAX. I: 2820 cd.
FLUX: 557 lm



BEAM ANGLE: 25°
MAX. I: 3013 cd.
FLUX: 557 lm






BEAM ANGLE: 36°
MAX. I: 1568 cd.
FLUX: 557 lm

LINEAR FIXTURE TRACK - MOUNTING & ACCESSORIES

LFT60-C


MOUNTING OPTIONS

TRIMLESS: LFT-T-11






TRIMLESS TRACK SECTION

Article number	TYPE
LFT-T-11-44	Channel
LFT-T-11-89	Channel

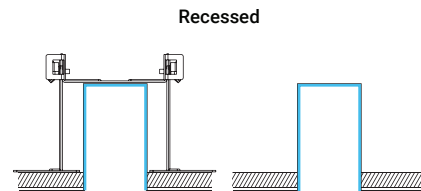


TRIM: LFT-F-11





TRIMMED TRACK SECTION

Article number	TYPE
LFT-F-11-44	Channel
LFT-F-11-89	Channel

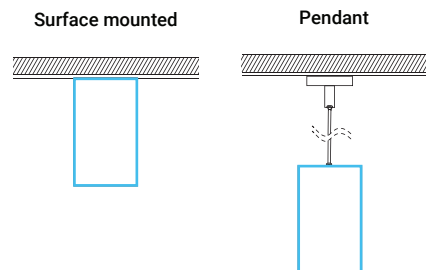


ACCESSORIES

ALL MODELS



3PCS

SKU : LFT-NC-02
Type: Surface mounted & Pendant reinforced plate



SKU : LFT-NC-07
Type : Light Leak-proof aluminium extrusion reinforce plate



Colours
Black White


SKU : LFT-NE-02-11 11.14" (283 mm)
LFT-NE-02-22 22.28" (566 mm)
Type : Blank cover




SKU :LFT-SA-41
Type:Power cord connector




SKU : LFT-PA-41-180 71" (1800 mm)
Type : Power cord connect to AC



SKU : LFT-SA-41-30 12" (300 mm)
LFT-SA-41-60 24" (600 mm)
Type : Power cord connect between modules




SKU : LFT-PSA-31-180 71" (1800 mm)
Type : Signal wire connect to system / dimmer



SKU : LFT-SSA-31-30 12" (300 mm)
LFT-SSA-31-60 24" (600 mm)
Type : Signal wire connect between modules

PENDANT

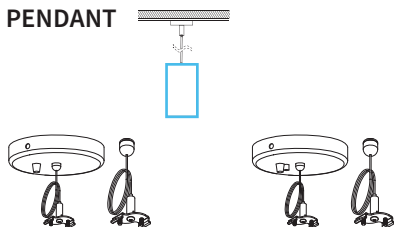


SKU : LFT-DI-15
Type : Pendant Kit for power connection (without power cord)

SKU : LFT-DI-15-V
Type : Pendant Kit for power connection (without power cord and single wire)


SKU : LFT-DI-16
Type : Pendant kit

TRIM



SKU : LFT-NC-05
Type : Trim end cap

TRIMLESS

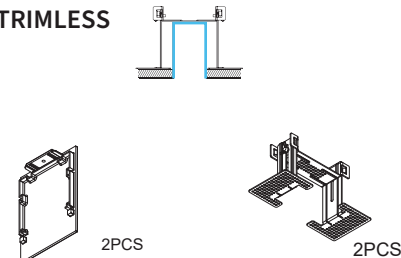

SKU : LFT-NC-03
Type : End cap

SKU : LFT-NR-01
Type: Trimless bracket