

UNDER WATER SERIES

UW-RM 52



YYZ UW series are refined underwater luminaires available in various size, wattage, multiple beam angles to suit varied project requirements. Constructed in 316L grade stainless steel body with high efficiency lens optic and hermetically sealed to IP68 through tempered glass diffuser. Application areas includes all under water, swimming pools etc.

FEATURES


LEDs	1 LED
FINISH	Stainless steel 316L
WORKING VOLTAGE	12V DC, 24V DC, 36V DC, 48V DC
RATED POWER	2W, 2.5W, 3W
BEAM ANGLE	5°, 8°, 10°, 12°, 25°, 40°, 60°
MOUNTING	Floor, Wall recessed
LENS	Tempered glass T=8mm
DIMENSIONS	Ø52x65mm(H)
OPERATION TEMP	-20° C - +50° C
LAMP LIFE	50,000 hrs
BODY COLOR	Stainless steel
CONTROL	On/Off, Triac, Dali, 1-10V
MAXIMUM RECESSING DEPTH	3 meter



ELECTRICAL DATA

SUPPLY VOLTAGE	12V DC, 24V DC, 36V DC, 48V DC
COLORS	2200K, 2700K, 3000K, 4000K, 5000K, 6500K, Red, Green, Blue, Yellow, Amber
CRI	80, 90

DIMENSION

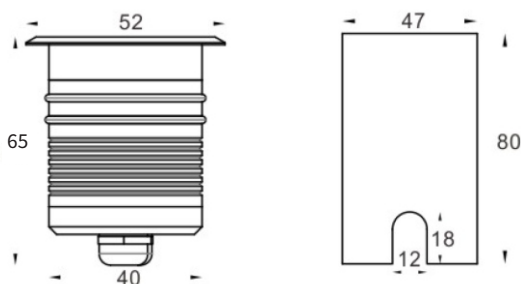

ORDERING LOGIC

PRODUCT	WATTAGE	OPTIC	COLOR TEMPERATURE	VOLTAGE	BODY COLOR	CRI	CUSTOM
UW-RM 52	2 - 2W	5	5° (CT22)	2200K	SS - Stainless steel	08 - 80	XX
		8	8° (CT27)	2700K			
		10	10° (CT30)	3000K			
	2.5 - 2.5W	12	12° (CT40)	4000K	48 - 48VDC		
		25	25° (CT50)	5000K			
		40	40° (CT65)	6500K			
		60	60° (RE)	Red			
		(GR)	Green				
		(BL)	Blue				
		(YE)	Yellow				
	(AM)	Amber					
	3 - 3W						

Sample: UW-RM 52 - 3 - 5 - CT 30 - 24 - SS - 08 - XX