

OAKEN ROUND LARGE DC SPEC SHEET




OAK-R-L-DC



IP66
WATER
PROOF



20 W (CC)
15 W (CC)

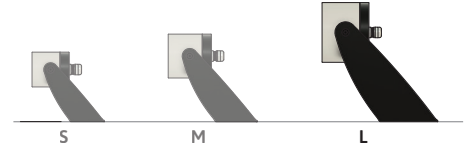

The Oaken series LED spotlights are a practical and aesthetic solution for highlighting outdoor areas. They are available with five optic configurations, ultra narrow, narrow, medium, wide and ultra wide for flexibility. With a chemically sealed glass lens and proprietary moisture barriers, the luminaire is capable of withstanding extreme outdoor conditions with consistent performance.

SPECIFICATION

	20W (CC)	15W (CC)
OPERATING TEMPERATURE	-20°C to + 50°C	
CRI	80	
CONTROL	Switched, 1-10V, 10V PWM Dimming	
INPUT CURRENT	480 mA	350 mA
NO OF LED	1	
LIGHT SOURCE	Cree COB	
CCT	2200K, 2700K, 3000K, 3500K, 4000K, 5000K	
BEAM ANGLE	13°, 21°, 30°, 44°, 52°	
FIXTURE CONNECTION	Pigtail	
AVAILABLE IP RATING	IP66	




OPTICAL DATA (3000K)

Beam Angle	20W	15W
13° Ultra Narrow	1509 lm	1132 lm
21° Narrow	1582 lm	1187 lm
30° Medium	1462lm	1097 lm
44° Wide	1445 lm	1084 lm
52° Ultra Wide	1444 lm	1083 lm

DELIVERED LUMENS BY CCT (Narrow beam 21°)


White	20W	15W
2200K	1280 lm	961 lm
2700K	1483 lm	1113 lm
3000K	1582 lm	1187 lm
3500K	1587 lm	1191 lm
4000K	1554 lm	1166 lm
5000K	1547 lm	1161 lm

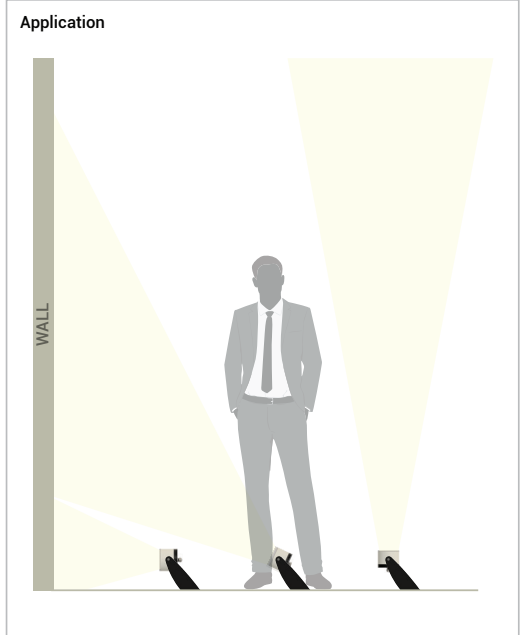

Spike Mount




180° Angle Swivel Base



Honeycomb Louver (Optional)



Visor (Optional)

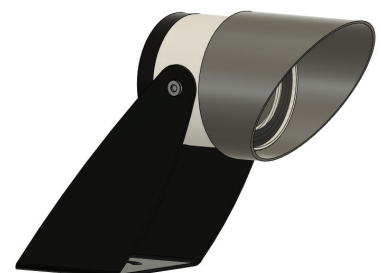

OAKEN ROUND LARGE DC SPEC SHEET

OAK-R-L-DC




ORDERING CODE


PRODUCT SERIES	TYPE	SIZE	POWER	COLOR TEMPERATURE	BEAM ANGLE	MOUNTING	VOLTAGE	ACCESSORIES
OAK - Oaken	R - Round	L - Large	15W - 15 Watts 20W - 20 Watts	CT22 - 2200K CT27 - 2700K CT30 - 3000K CT35 - 3500K CT40 - 4000K CT50 - 5000K	13D - 13 Degree 21D - 21 Degree 30D - 30 Degree 44D - 44 Degree 52D - 52 Degree	SM - Surface Mount SP - Spike Mount	DC - 24 VDC	N - None H - Honeycomb V - Visor
						FIXTURE FINISHING		
						BODY FINISH	TRIM FINISH	
						BWH - White	TWH - White	
						BBL - Black	TBL - Black	
						BSL - Silver	TSL - Silver	
						BCM - Custom	TGL - Gold	
							TCM - Custom	

Sample: OAK-R-L-20W-CT22-13D-SM-DC-H-BWH-TBL


DIMENSIONS

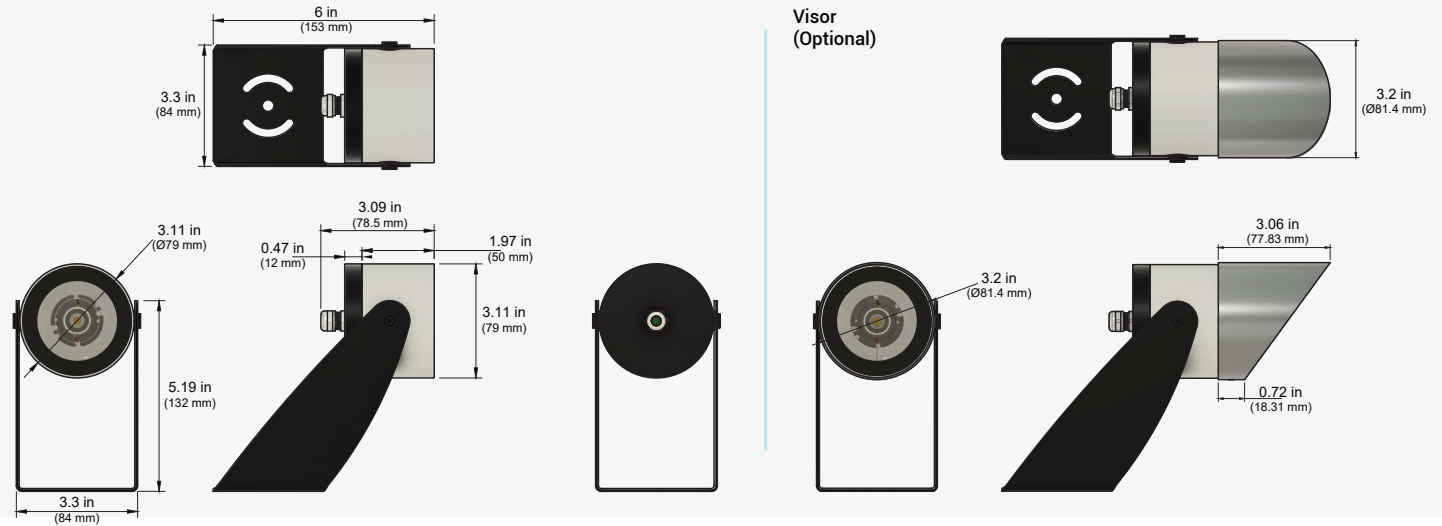


PHOTOMETRIC DATA

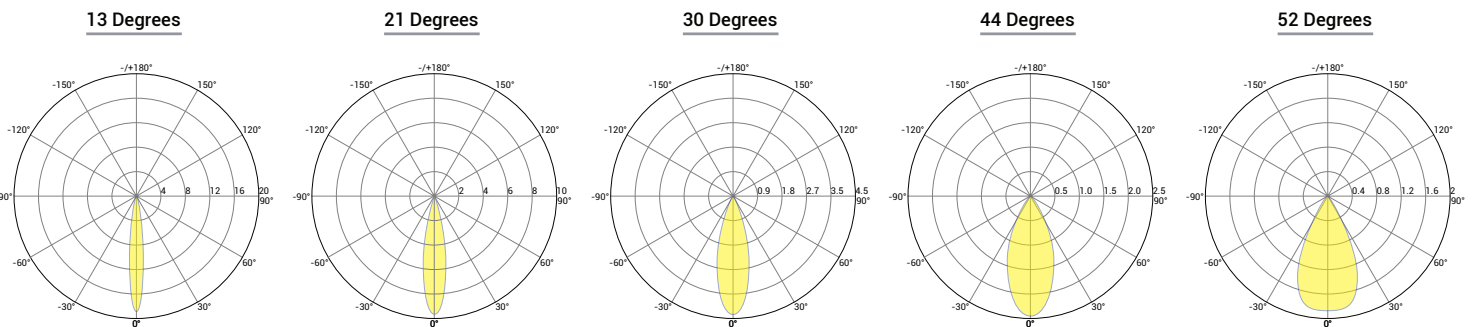

BIN Details (CIE 1931)

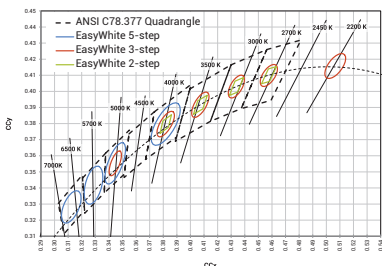

Spectral Distribution

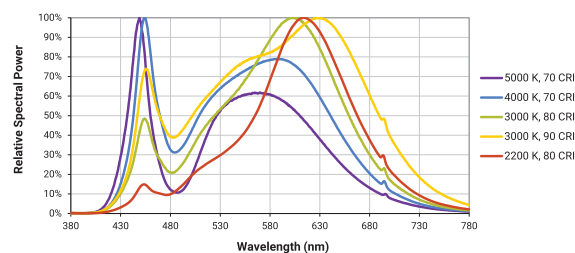

RELATED PRODUCTS

OAK - Round Large - AC

