

FLUTE TWIST CEILING LIGHT

FLT TST

Mono IP20 CE

YYZ Flute range of architectural surface and pendant lights features premium aluminium housing that facilitates efficient performance. Provided with basic anti-glare shield in White/Black/Golden color. Deep anti-glare shield in Anodized black/Darklight/Champagne gold available on request. Reflector/Lens technology is employed according to the wattage requirement.

FEATURES

FINISH	BLACK, GREY, WHITE
WORKING VOLTAGE	110-240V 50/60Hz
RATED POWER	7W
RADIANCE ANGLE	NARROW, MEDIUM, WIDE, SUPER WIDE
LAMP LIFE	50,000 HRS
BEAM ANGLE	36°
MOUNTING	SURFACE MOUNTED
CONNECTION	INDOOR RATED CONNECTIONS
DIMENSIONS	Ø58 x 222mm
OPERATION TEMP	-20° C to +50° C
CONTROL	ON/OFF, TRIAC



CITIZEN/LUMILEDS
LED Quality


110-240 V AC
Working Voltage

7 W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	7W
SUPPLY VOLTAGE	110-240VAC
COLORS	2700K, 3000K, 3500K, 4000K
CRI	90+
LUMEN	90 lm/W

DIMENSIONS

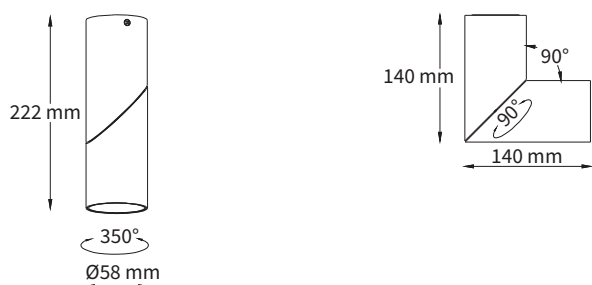

ORDERING LOGIC

PRODUCT	CONTROL	WATTAGE	COLOR TEMPERATURE	VOLTAGE	BEAM ANGLE	FINISH	ACCESSORIES	CUSTOM
FLT TST-7	ON/OFF TRIAC	7 - 7W	CT27	2700K	N - Narrow M - Medium W - Wide UW - Ultra wide	BL - Black	HCL - Honey Combo Louver	xx
			CT30	3000K		GR - Grey	LSL - Linear Spread Lens	
			CT35	3500K		WH - White	WWV - Wall Washer Visor	
			CT40	4000K			SP - Spread Lens	
							BD - Barn Doors	

Sample: FLT TST-7 - ON/OFF - 7 - CT27 - 240 - N - BL - HCL - XX

Honeycomb Linear spread lens Wall washer visor Spread lens Barn doors