

LINEAR FLOOD LIGHT SPEC SHEET

LFL-2



IP66
WATER
PROOF



600W

The LFL linear flood light series is engineered for exceptional outdoor landscape lighting. Featuring a high-strength aluminum alloy shell and a powerful monochromatic high-output LED, this lamp is ideal for highlighting specific areas or creating stunning landscape projections. With its versatile design, it's perfect for use on building facades, elevated structures, or cylindrical surfaces, delivering impressive projection effects and outstanding performance for any setting.

SPECIFICATION

LED SOURCE	Cree / Lumileds
LED QUANTITY	180 pcs
RATED POWER	600 W
OPERATING VOLTAGE	100-305V AC
FREQUENCY RANGE	50/60 Hz
EFFICACY	88 lm/W
LUMEN OUTPUT	52, 598 lm
COLOR	2700K, 3000K, 4000K, 6500K
BEAM ANGLES	2.6°, 6°, 12°, 20°, 30°, 45°, 60°, 10° x 70°, 5° x 20°
CONTROL	Switched, 0-10V Dimming, Dali
LAMP LIFE	80,000 hrs
IP RATING	IP66
OPERATING TEMP.	-25°C to +50°C
AMBIENT HUMIDITY	10% to 90%

V 100-305V AC
Operating Voltage

W 600W
Rated power

Visor (Optional)




ORDERING CODE

PRODUCT	Model	POWER	BEAM ANGLE	COLOR	VOLTAGE	CONTROL	ACCESSORY	MOUNTING
LFL - Linear Flood Light	2 - Model 2	600W - 600 Watts	2.6° - 2.6° 6° - 6° 12° - 12° 20° - 20° 30° - 30° 45° - 45° 60° - 60° 10x70° - 10°x70° 5x20° - 5°x20°	CT27 - 2700K CT30 - 3000K CT40 - 4000K CT65 - 6500K	AC - 100-305V DC	SW - Switched DM - 0-10V DA - Dali	N - None V - Visor	SB - Swivel Bracket

Sample: LFL-2-600W-20-CT30-AC-SW-N-SB


DIMENSIONS

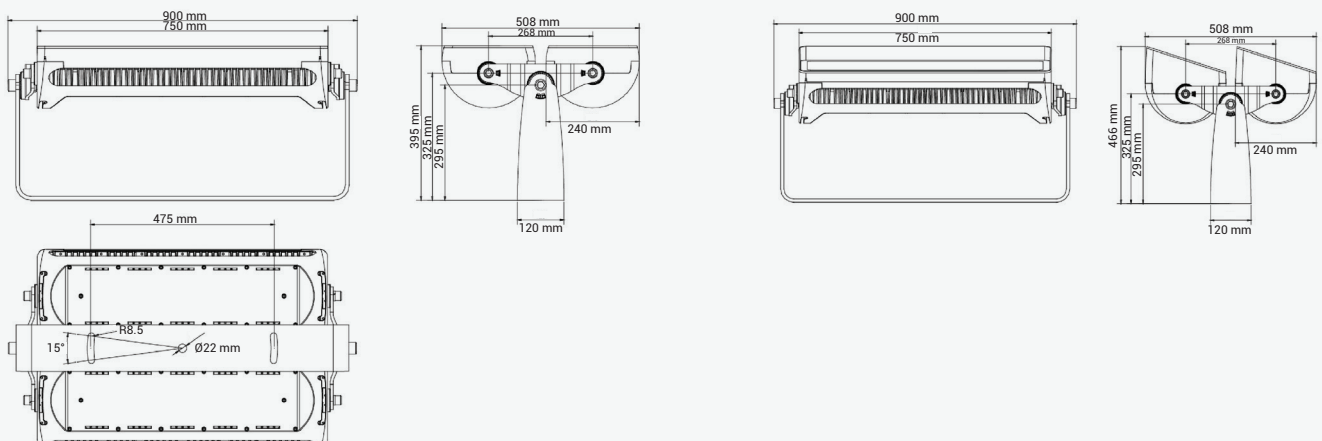

LINEAR FLOOD LIGHT SPEC SHEET

LFL-2

DISTANCE (2.6°)

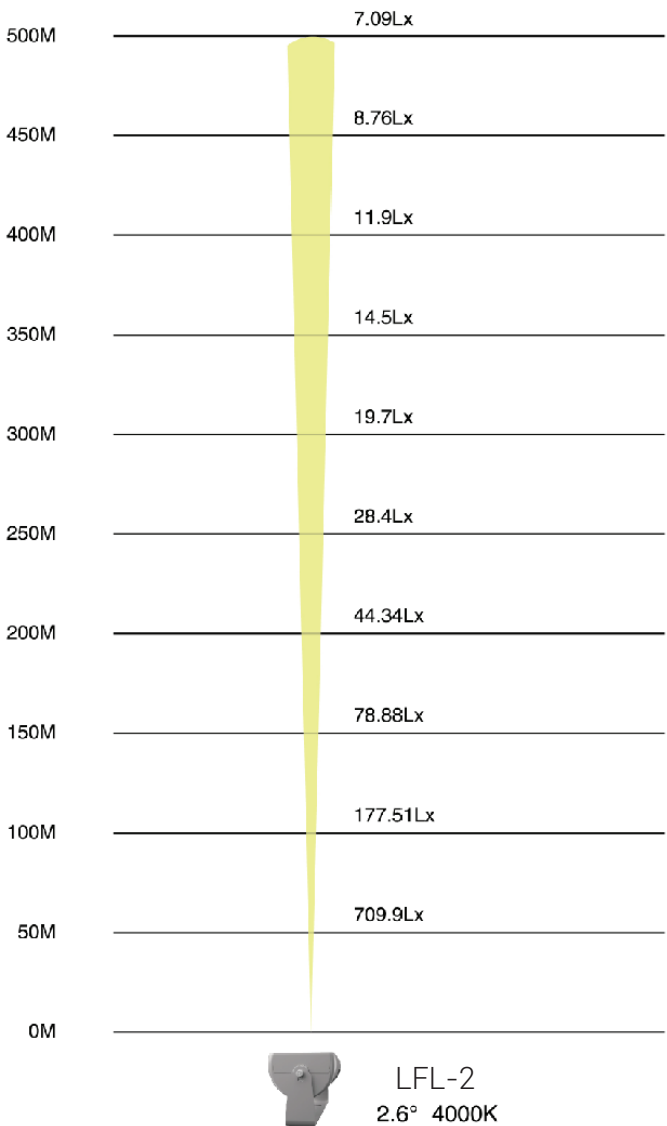

PHOTOMETRIC DATA

