

# TUSKER NA DOWNLIGHT SPEC SHEET

TSR-NA-30W




YYZ Tusker downlight series are anti-glare architectural lighting with symmetric light distribution having UGR<16. It has beautifully sharpened aluminum reflector that uses an innovative technology and is available in a variety of colors. The variety of sizes promote the power range from 7W-30W.

## SPECIFICATIONS



OPERATING VOLTAGE	120 - 277 V AC
OPERATING TEMPERATURE	-20° C to +50° C (-4° F to +122° F)
RATED POWER	30W
CONTROL	Switched, TRIAC, Dimmable
FLUX	100 lm/W
CRI	80, 90 (CCT 2700K to 5000K only)
UGR	UGR <16
LED DRIVER	Class II LED Driver
CCT	2700K, 3000K, 4000K, 5000K, 6500K
MATERIAL	Die-cast aluminum
FLANGE FINISH	White, Black
PROJECTION	30°, 45°
IP RATING	IP44 (Suitable for damp locations)
MOUNTING	Ceiling Recessed
CONNECTION	Indoor-rated connections
LAMP LIFE	50,000 hrs.
DIMENSIONS	Dia. 5.35", 3.86" ht. (Cutout Dia. 4.56") Dia. 136 mm, 98 mm ht. (Cutout Dia. 116 mm)
CERTIFICATION	ETL Listed
WARRANTY	5 years warranty




Mounting Ceiling Recessed



## DIMENSIONS

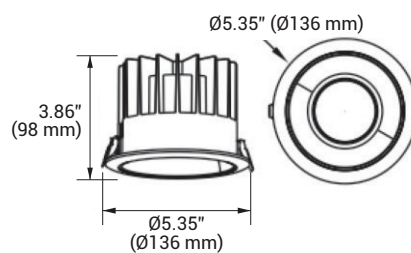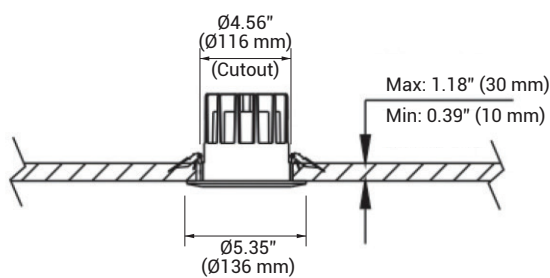

Driver Dimensions

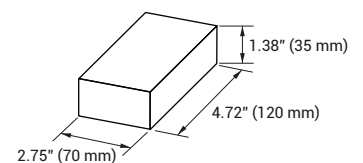

## ORDERING CODE

PRODUCT SERIES	WATTAGE	COLOR TEMPERATURE		CRI	CONTROL		VOLTAGE	OPTICS	FLANGE FINISH	REFLECTOR				
TSR-NA - TUSKER North America	30 - 30W	CT 27	-	2700K	80	SW -	ON/OFF	CUNV - 120-277 VAC	30D -	30°	WH - WHITE (Standard)	SL -	Matt Silver (Standard)	
		CT 30	-	3000K	90	TRIAC -	TRIAC		45D -	45°	BK - BLACK	BK -	Black	
		CT 40	-	4000K		DIM10 - 0-10V Dimming						GD -	Gold	
		CT 50	-	5000K								CG -	Champagne Gold	
		CT65	-	6500K (80 CRI only)										

Sample: TSR-NA-30-CT27-90-DIM10-CUNV-30D-WH-GD