

TUSKER NA DOWNLIGHT SPEC SHEET


TSR-NA-20W






YYZ Tusker downlight series are anti-glare architectural lighting with symmetric light distribution having UGR<16. It has beautifully sharpened aluminum reflector that uses an innovative technology and is available in a variety of colors. The variety of sizes promote the power range from 7W-30W.

SPECIFICATIONS

OPERATING VOLTAGE	120 - 277 V AC
OPERATING TEMPERATURE	-20° C to +50° C (-4° F to +122° F)
RATED POWER	20W
CONTROL	Switched, TRIAC, Dimmable
FLUX	100 lm/W
CRI	80, 90 (CCT 2700K to 5000K only)
UGR	UGR <16
LED DRIVER	Class II LED Driver
CCT	2700K, 3000K, 4000K, 5000K, 6500K
MATERIAL	Die-cast aluminum
FLANGE FINISH	White, Black
PROJECTION	30°, 45°
IP RATING	IP44 (Suitable for damp locations)
MOUNTING	Ceiling Recessed
CONNECTION	Indoor-rated connections
LAMP LIFE	50,000 hrs.
DIMENSIONS	Dia. 5.35", 3.86" ht. (Cutout Dia. 4.56") Dia. 136 mm, 98 mm ht. (Cutout Dia. 116 mm)
CERTIFICATION	ETL Listed
WARRANTY	5 years warranty
INSTALLATION	IC Type, easy installation with J-box (no housing needed)

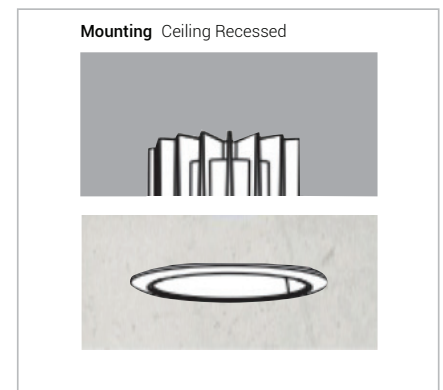

DIMENSIONS

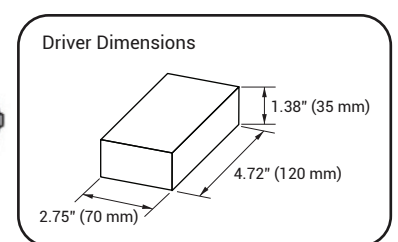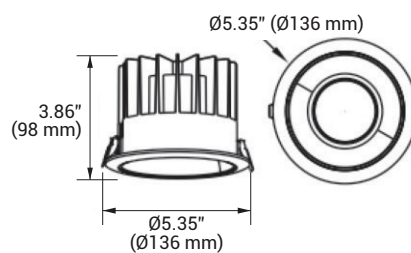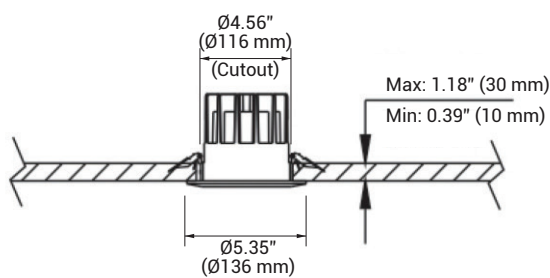

ORDERING CODE

PRODUCT SERIES	WATTAGE	COLOR TEMPERATURE	CRI	CONTROL	VOLTAGE	OPTICS	FLANGE FINISH	REFLECTOR
TSR-NA - TUSKER North America	20 - 20W	CT 27 - 2700K	80	SW - ON/OFF	CUNV - 120-277 VAC	30D - 30°	WH - WHITE (Standard)	SL - Matt Silver (Standard)
		CT 30 - 3000K	90	TRIAC - TRIAC		45D - 45°	BK - BLACK	BK - Black
		CT 40 - 4000K		DIM10 - 0-10V Dimming				GD - Gold
		CT 50 - 5000K						CG - Champagne Gold
		CT65 - 6500K (80 CRI only)						

Sample: TSR-NA-20-CT27-90-DIM10-CUNV-30D-WH-GD