

TUSKER NA DOWNLIGHT SPEC SHEET

TSR-NA-18W




YYZ Tusker downlight series are anti-glare architectural lighting with symmetric light distribution having UGR<16. It has beautifully sharpened aluminum reflector that uses an innovative technology and is available in a variety of colors. The variety of sizes promote the power range from 7W-30W.

SPECIFICATIONS



OPERATING VOLTAGE	120 - 277 V AC
OPERATING TEMPERATURE	-20° C to +50° C (-4° F to +122° F)
RATED POWER	18W
CONTROL	Switched, TRIAC, Dimmable
FLUX	100 lm/W
CRI	80, 90 (CCT 2700K to 5000K only)
UGR	UGR <16
LED DRIVER	Class II LED Driver
CCT	2700K, 3000K, 4000K, 5000K, 6500K
MATERIAL	Die-cast aluminum
FINISH	White, Black
PROJECTION	30°, 45°
IP RATING	IP44 (Suitable for damp locations)
MOUNTING	Ceiling Recessed
CONNECTION	Indoor-rated connections
LAMP LIFE	50,000 hrs.
DIMENSIONS	Dia. 4.53", 3.42" ht. (Cutout Dia. 3.74") Dia. 115 mm, 87 mm ht. (Cutout Dia. 95 mm)
CERTIFICATION	ETL Listed
WARRANTY	5 years warranty
INSTALLATION	IC Type, easy installation with J-box (no housing needed)



Mounting Ceiling Recessed



DIMENSIONS

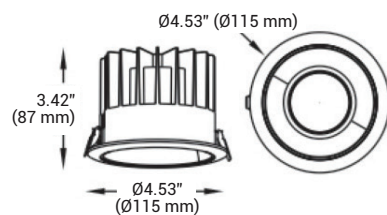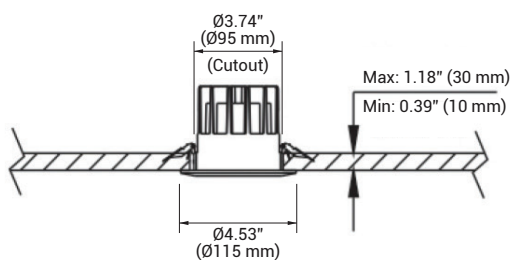

ORDERING CODE

PRODUCT SERIES	WATTAGE	COLOR TEMPERATURE		CRI	CONTROL		VOLTAGE	OPTICS	FINISH	REFLECTOR			
TSR-NA - TUSKER North America	18 - 18W	CT 27	-	2700K	80	SW -	ON/OFF	CUNV - 120-277 VAC	30D -	30°	WH - WHITE (Standard)	SL -	Silver (Standard)
		CT 30	-	3000K	90	TRIAC -	TRIAC		45D -	45°	BK - BLACK	BK -	Black
		CT 40	-	4000K		DIM10 - 0-10V Dimming						GD -	Gold
		CT 50	-	5000K							CG -	Champagne Gold	
		CT65	-	6500K (80 CRI only)									

Sample: TSR-NA-18-CT27-90-DIM10-CUNV-30D-WH-GD